



# DS 200P

## Electronic Pressure Switch

Pressure Ports and Process Connections with Flush Welded Stainless Steel Diaphragm

accuracy according to IEC 60770:  
standard: 0.35 % FSO  
option: 0.25 % FSO

### Nominal pressure

from 0 ... 100 mbar up to 0 ... 40 bar

### Contacts

1, 2 or 4 independent PNP contacts,  
freely configurable

### Analogue output

2-wire: 4 ... 20 mA

3-wire: 4 ... 20 mA / 0 ... 10 V

others on request

### Special characteristics

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module
- ▶ configurable contacts (switch on / switch off points, hysteresis / window mode, switch on / switch off delay)

### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe for gases
- ▶ customer specific versions

The electronic pressure switch DS 200P is the successful combination of

- ▶ intelligent pressure switch
- ▶ digital display

and is suitable for the usage with viscous and pasty media.

As standard the DS 200P offers a PNP contact and a rotatable display module with 4-digit LED display. Optional versions like e.g. an intrinsically safe version, max. four contacts and an analogue output complete the profile.

### Preferred areas of use are



Food industry



Pharmacy



74-06



Input pressure range <sup>1</sup>																	
Nominal pressure gauge	[bar]	-1 ... 0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6	10	16	25	40	
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6	10	16	25	40	
Overpressure	[bar]	5	0.5	1	1	2	5	5	10	10	20	40	40	80	80	105	
Burst pressure ≥	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	50	120	120	210	
Vacuum resistance		P <sub>N</sub> ≥ 1 bar: unlimited vacuum resistance								P <sub>N</sub> < 1 bar: on request							

<sup>1</sup> consider the pressure resistance of fitting and clamps

Contact <sup>2</sup>	
Standard	1 PNP contact
Options	2 independent PNP contacts 4 independent PNP contacts (possible with M12x1, 8-pin for 4 ... 20 mA/3-wire; 0 ... 10 V/3-wire on request)
Max. switching current	4 ... 20 mA / 2- and 3-wire: contact rating 125 mA, short-circuit resistant; V <sub>Switch</sub> = V <sub>S</sub> - 2V 0 ... 10 V / 3-wire: contact rating 125 mA, short-circuit resistant
Accuracy of contacts <sup>3</sup>	standard: P <sub>N</sub> < 0.4 bar: ≤ ± 0.5 % FSO P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.35 % FSO option: P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.25 % FSO
Repeatability	≤ ± 0.1 % FSO
Switching frequency	max. 10 Hz
Switching cycles	> 100 x 10 <sup>6</sup>
Delay time	0 ... 100 sec

<sup>2</sup> max. 1 contact for 2-wire current signal with plug ISO 4400 as well as 2-wire current signal with IS-protection  
no contact possible with 3-wire in combination with plug ISO 4400

<sup>3</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Analogue output (optionally) / Supply	
2-wire current signal	4 ... 20 mA / V <sub>S</sub> = 13 ... 36 V <sub>DC</sub> permissible load: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω response time: < 10 msec
2-wire current signal with IS-protection	4 ... 20 mA / V <sub>S</sub> = 15 ... 28 V <sub>DC</sub> permissible load: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω response time: < 10 msec
3-wire current signal	4 ... 20 mA / V <sub>S</sub> = 19 ... 30 V <sub>DC</sub> adjustable (turn-down of span 1:5) <sup>4</sup> permissible load: R <sub>max</sub> = 500 Ω response time: < 0.5 sec
3-wire voltage signal	0 ... 10 V / V <sub>S</sub> = 15 ... 36 V <sub>DC</sub> permissible load: R <sub>min</sub> = 10 kΩ response time: < 10 msec
Without analogue output	V <sub>S</sub> = 15 ... 36 V <sub>DC</sub>
Accuracy <sup>3</sup>	standard: P <sub>N</sub> < 0.4 bar: ≤ ± 0.5 % FSO P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.35 % FSO option: P <sub>N</sub> ≥ 0.4 bar: ≤ ± 0.25 % FSO

<sup>4</sup> with turn-down of span the analogue signal is adjusted automatically to the new measuring range

Thermal errors (Offset and Span) <sup>5</sup> / Permissible temperatures				
Nominal pressure P <sub>N</sub>	[bar]	-1 ... 0	< 0.40	≥ 0.40
Tolerance band	[% FSO]	≤ ± 0.75	≤ ± 1.5	≤ ± 0.75
in compensated range	[°C]	-20 ... 85	0 ... 50	-20 ... 85
Permissible temperatures <sup>6</sup>	medium:	-40 ... 125 °C for filling fluid silicone oil -10 ... 125 °C for filling fluid food compatible oil		
	electronics / environment:	-40 ... 85 °C		
	storage:	-40 ... 100 °C		
Permissible temperature medium for cooling element 300 °C	filling fluid silicone oil	overpressure: -40 ... 300 °C	vacuum: -40 ... 150 °C <sup>7</sup>	
	filling fluid food compatible oil	overpressure: -10 ... 250 °C	vacuum: -10 ... 150 °C	

<sup>5</sup> an optional cooling element can influence thermal effects for offset and span depending on installation position and filling conditions.

<sup>6</sup> max. temperature of the medium for nominal pressure gauge > 0 bar: 150 °C for 60 minutes with a max. environmental temperature of 50 °C

<sup>7</sup> also for P<sub>abs</sub> ≤ 1 bar

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	5 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6
Shock	100 g / 11 msec according to DIN EN 60068-2-27

Filling fluids	
Standard	silicone oil
Options	food compatible oil according to 21CFR178.3570 (Mobil SHC Cibus 32; Category Code: H1; NSF Registration No.: 141500)

Materials	
Pressure port	stainless steel 1.4435 (316 L) others on request
Housing	stainless steel 1.4404 (316 L)
Display housing	PA 6.6, Polycarbonate
Seals (media wetted)	standard: FKM (recommended for medium temperatures ≤ 200 °C) option: FFKM (recommended for medium temperatures > 200 °C) clamp, dairy pipe, Varivent®: without
Diaphragm	standard: stainless steel 1.4435 (316 L) option: Hastelloy® C-276 (2.4819); Tantalum on request
Media wetted parts	pressure port, seals, diaphragm


Explosion protection (only for 4 ... 20 mA / 2-wire)	
Approval AX14-DS 200P	IBExU06ATEX1050 X zone 1: II 2G Ex ia IIC T4 Gb (connector) / II 2G Ex ia IIB T4 Gb (cable)
Safety technical maximum values	$U_i = 28 \text{ V}$ , $I_i = 93 \text{ mA}$ , $P_i = 660 \text{ mW}$ , $C \approx 0 \text{ nF}$ , $L_i \approx 0 \text{ }\mu\text{H}$
Max. switching current <sup>8</sup>	70 mA
Permissible temperatures for environment	-25 ... 70 °C
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 100 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$

<sup>8</sup> the real switching current in the application depends on the power supply unit

### Miscellaneous

Display	4-digit, red 7-segment-LED display, digit height 7 mm, range of indication -1999 ... +9999; accuracy 0.1 % $\pm$ 1 digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable)
Current consumption (without contacts)	2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 45 mA + signal current 3-wire signal output voltage: approx. 45 mA
Ingress protection	IP 65
Installation position	any (standard calibration in a vertical position with the pressure port connection down; different installation position for $P_N \leq 2 \text{ bar}$ have to be specified in the order)
Weight	approx. 160 ... 250 g
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU


### Wiring diagrams

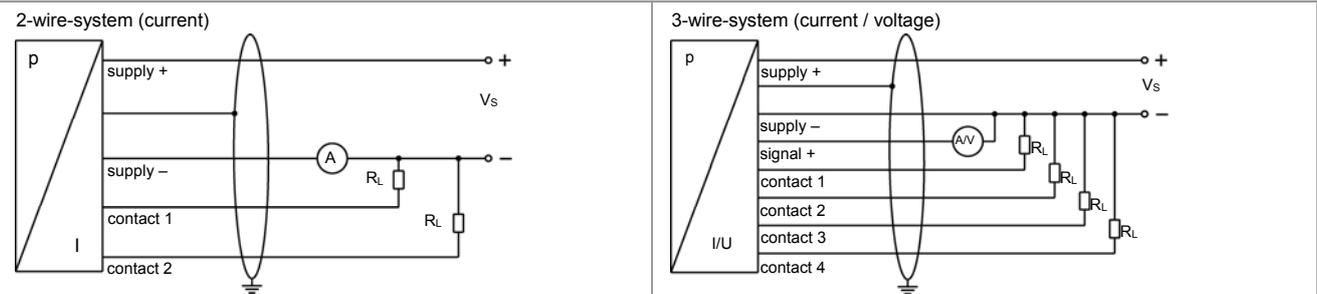

### Pin configuration

Electrical connection	M12x1 plastic (5-pin)	M12x1 metal (5-pin)	M12x1 plastic (8-pin)	ISO 4400	Binder series 723 (5-pin)	cable colours (IEC 60757)
Supply +	1	1	1	1	1	wh (white)
Supply -	3	3	3	2	3	bn (brown)
Signal + (only 3-wire)	2	2	2	3	2	gn (green)
Contact 1	4	4	4	3	4	gy (grey)
Contact 2	5	5	5	-	5	pk (pink)
Contact 3	-	-	6	-	-	bu (blue)
Contact 4	-	-	7	-	-	rd (red)
Shield	via pressure port	plug housing/pressure port	via pressure port	ground contact	plug housing/pressure port	gnye (green-yellow)


### Electrical connections (dimensions in mm)

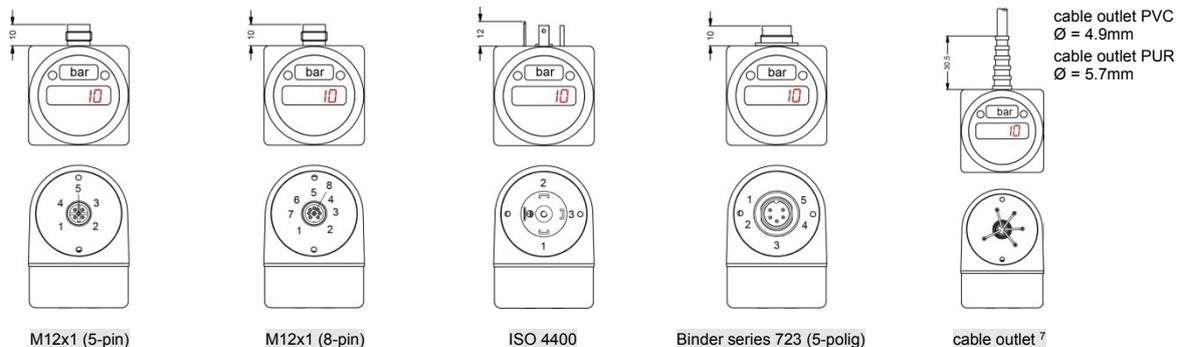



<sup>7</sup> different cable types and lengths available, permissible temperature depends on kind of cable; standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70°C)

### Mechanical connections (dimensions in mm)








#### Standard

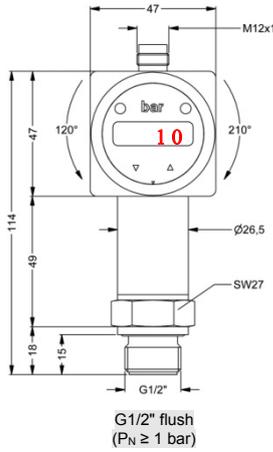

#### Option

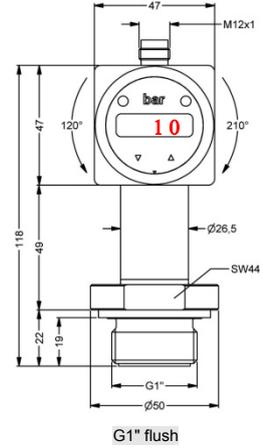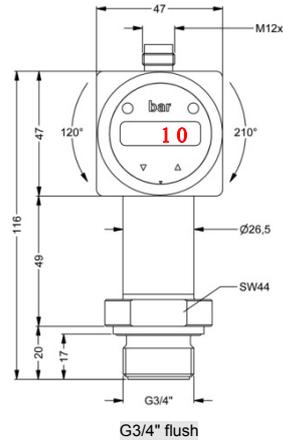

#### Option

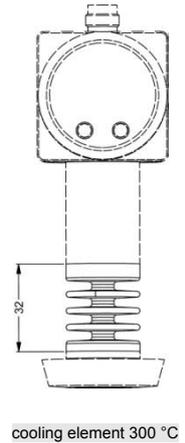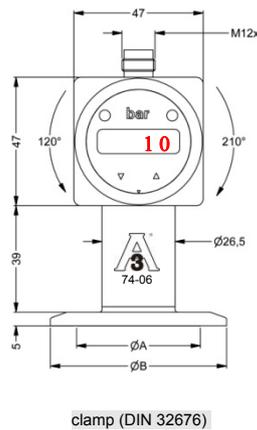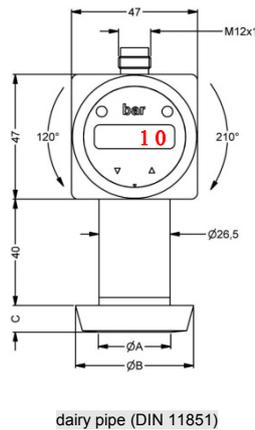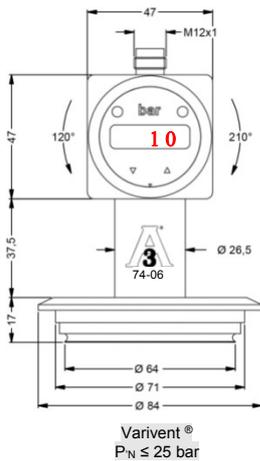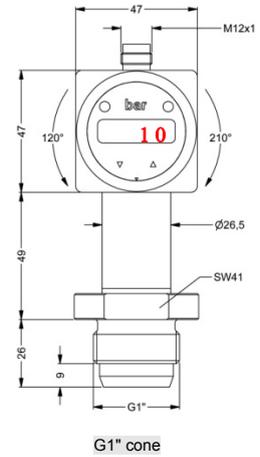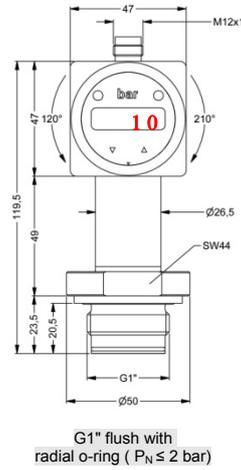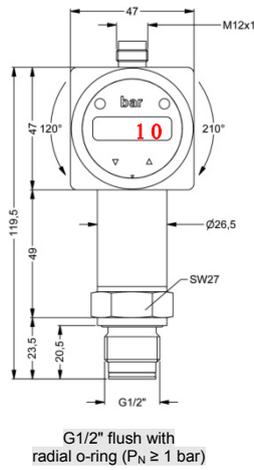

dimensions in mm			
size	DN 25	DN 40	DN 50
A	23	32	45
B	44	56	68,5
C	10	10	11
$P_N$ [bar]	$\geq 0,25$ $\leq 40$	$\geq 0,25$ $\leq 40$	$\geq 0,25$ $\leq 25$

dimensions in mm				
size	3/4"	DN 25	DN 32	DN 50
A	14	23	32	45
B	25	50,5	50,5	64
$P_N$ [bar]	$\geq 4$ $\leq 8$	$\geq 0,25$ $\leq 16$	$\leq 16$	$\leq 16$

⇕ **SIL- and SIL-Ex version: total length increases by 26.5 mm!**  
⇕ **metric threads and other versions on request**

© 2019 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

