

CENTER 337 MINI LIGHTMETER



CE

- 5 Digital Display
- Auto Ranging
- Automatic Power Off
- fc / lx Function Selectable
- HOLD Function
- Range Display
- Automatic Zero When Power On


CENTER®

CENTER 337 MINI LIGHTMETER


● FEATURE

- 5 Digital Display
- Auto Ranging
- Automatic Power Off
- fc / lx Function Selectable
- HOLD Function
- Range Display
- Automatic Zero When Power On


Range Display

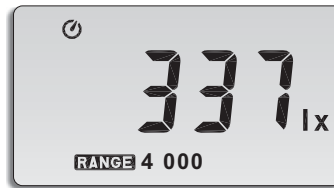

Automatic Zero When Power On

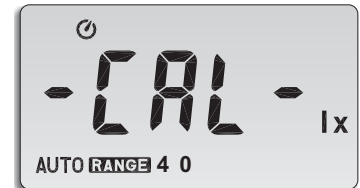

● SPECIFICATIONS

- **Light Range:** 0.000~4000 fc
0.00~40000 lx
- **Sample Rate:** 2 times/sec
- **Auto Power Off:** 30 minutes
- **Low Battery Indication:** The  is displayed.
- **Battery Type:** 9V Battery
- **Battery Life:** 150 hours approx.
- **Operation Temperature:** 0°C to 40 °C
- **Storage Temperature:** -10°C to 60 °C
- **Dimensions:** 196mm(L) x54mm(W) x34mm(H)
- **Weight:** approx. 180g

Use CENTER 337 Lightmeter to monitor the illumination of working environment. This will ensure the comfortable and healthy working condition.



* The specifications and other information in this catalogue are subject to change without prior notice.

CENTER[®]
CENTER TECHNOLOGY CORP.

4/F., NO.415, Jung-Jeng Rd., 238 Shu-Lin, Taipei, Taiwan
TEL: 886-2-26763926 E-Mail: center@centertek.com
FAX: 886-2-26763925 http: //www.centertek.com

Distributed by:

Impex Produkter AS

Verkseier Furulunds vei 15
0668 OSLO
Tel. 22 32 77 20
Fax 22 32 77 25
info@impex.no
www.impex.no