



DMT152 Dewpoint Transmitter

For Low Dew Point Measurement in OEM Applications



Features

- Vaisala DRYCAP® technology with a polymer sensor
- Measures dew point down to -80 °C (-112 °F)
- Withstands condensation
- Traceable calibration (certificate included)
- Applications: dry chambers, dry gases, semiconductor manufacturing, research and testing, and compressed air

The Vaisala DRYCAP® Dewpoint Transmitter DMT152 is designed for measuring low dew point in OEM applications, even down to -80 °C . The excellent long-term stability and reliability of its performance is based on the latest DRYCAP® polymer sensor technology.

Low Maintenance

The DMT152 mechanics have been designed for harsh environments requiring protection against dust, dirt, and splashed water. The DRYCAP® technology has a low maintenance need due to its excellent long-term stability and durability against condensation.

Applications

The DMT152 is an ideal choice for industrial applications where it is necessary to control very low humidity. Most typical areas of use are air and plastics dryers, dry chambers, dry gases, and high-voltage circuit breakers. The DMT152 measures accurately and reliably also in the challenging combination of low humidity and hot air, which is typical in plastics drying.

Benefits

- Accurate
- Compact and powerful
- Fast response time
- Reduced maintenance costs due to long calibration interval

Technical Data

Measurement Performance

Sensor Vaisala DRYCAP® 180U
Thin-film capacitive polymer sensor

Recommended calibration interval 2 years

Dew Point Temperature

Measurement range -80 ... -10 °C (-112 ... +14 °F) T_d


Accuracy

-80 ... -40 °C (-112 ... -40 °F) ±2 °C (3.6 °F) T_d

-40 ... -20 °C (-40 ... -4 °F) ±3 °C (5.4 °F) T_d

Non-calibrated range -100 ... +20 °C (-148 ... +68 °F) T_d

Accuracy over temperature range:

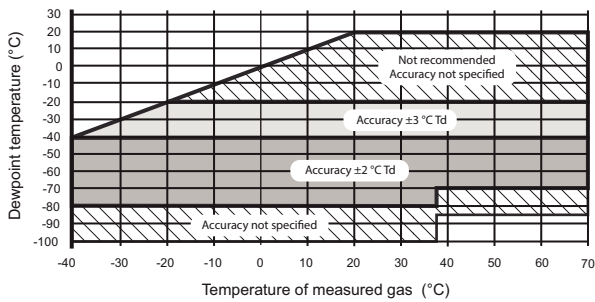

Typical response time 63 % [90 %] at a gas temperature of +20 °C (+68 °F) and pressure of 1 bar:

-10 ... -80 °C T_d 0.5 min [7.5 min]

-80 ... -10 °C T_d 2 s [5 s]

Typical long-term stability Better than 2 °C (3.6 °F) /year

Concentration by Volume (ppm)

Measurement range (typical) 0 ... 500 ppm

Accuracy at +20 °C (+68 °F), 1013 mbar ±(0.2 ppm + 20 % of reading)

Operating Environment

Temperature -40 ... +70 °C (-40 ... +158 °F)

Relative humidity 0 ... 100 %RH (up to +20 °C/+68 °F)

Pressure 0 ... 50 bar (725 psia)

Measured gases Non-corrosive gases

Sample flow rate No effect on measurement accuracy

Accessories

Connection cable for MI70 hand-held indicator 219980

USB cable for pc connection 219690

NW40 flange 225220SP

Sampling cells (available for ISO G_{1/2}")

basic sampling cell DMT242SC

with Swagelok 1/4" male connectors DMT242SC2

with a quick connector and leak screw DSC74

two-pressure sampling cell DSC74B

Inputs and Outputs

Two analog outputs (scalable) 4 ... 20 mA, 0 ... 20 mA (3 wire) 0 ... 5 V, 0 ... 10 V

Accuracy of analog outputs ±0.01 V / ±0.01 mA

Digital output RS-485 (2-wire)

Alarm-level indication by analog signal User selectable

Purge information 5 V, 10 V, 20 mA or LED

Operating Voltage

RS-485 output 11¹⁾... 28 VDC

voltage output 15¹⁾ ... 28 VDC

current output 21 ... 28 VDC

Supply Current

normal measurement 20 mA + load current

during self-diagnostics Max. 220 mA pulsed

Supply voltage fluctuation Max. 0.3 V

External Load

voltage output Min. 10 kΩ

current output Max. 500 Ω

1) For extended temp. down to -40 °C (-40 °F) or pressure up to 50 bar (725 psia), the supply voltage is 21 ... 28 VDC.

Mechanical Specifications

Housing material (wetted parts) AISI316L

Stainless steel mesh filter Filter body AISI303, mesh AISI316L, grade 18 μm


Mechanical connections ISO G_{1/2}", NPT 1/2", UNF 3/4" - 16"

Housing classification IP66

Storage temperature range -40 ... +80 °C (-40 ... +176 °F)

Weight (ISO G_{1/2}") 190 g (6.70 oz)

Complies with EMC standard EN61326-1, Electrical equipment for measurement control and laboratory use - EMC requirements; Industrial environment

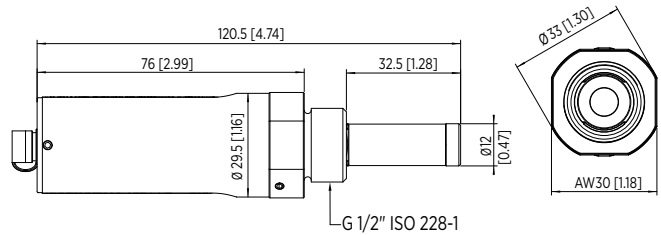

Dimensions in mm (inches)

